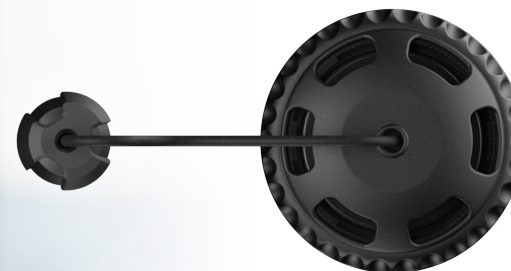



OPV
POI
—CLASSICO.P.V.
P01 CLASSIC
RIDGELID DESIGN
P01 RIDGESPRING DYNAMICS
BASE COILPLATE PROFILE
CLASSICGASKET TYPE
STANDARD↓ Fits **P01** Series
Flanges ↓

A V A I L A B L E C O N F I G U R A T I O N S

O V E R P R E S S U R E S E T T I N G S



SPRING 1.2

0,18 BAR
2,61 PSI

SPRING 1.4

0,24 BAR
3,48 PSI

P U L L K N O B S

**POI**
SERIES
O.P.V. | O.P.V. P01 CLASSIC
RIDGE

P01 CLASSIC SERIES - Simple overpressure system designed for reliable pressure control. Offers durability and ease of use, suitable for a wide range of applications.

RIDGE LID DESIGN - Features a ridge-based lid design for enhanced grip

P01 SERIES - FLANGE SPECS - Designed for the P01 series flanges: Diameter 53 mm, Collar height 13-14 mm, Trapezoidal thread with 3 mm pitch, 8-sector interface.

O.P. VALVE SPECS

O.P.V. PO1 RIDGE

anti-slip, ridge-based lid design with classic, cylindrical spring and standard disk gasket, enabling a maximum exhaust capacity of 450 L/min
Compatible with P01 Series flanges for a standard profile height.

P01 CLA Ridge Lid
21,5 mm
0,85 "

SYSTEM FEATURES



P01 Ridge Lid
Anti-slip,
Ridge-based design

FLANGE FIT



P01 Series Flanges Fit
Flange diameter ~53 mm / ~2.09 "
Standard Profile
Min. collar height ~14 mm / ~0.55 "
Trapezoidal thread, 3 mm pitch
8-Ridge alternating interlock coupling section

SPRING DYNAMICS



Base Coil Spring
Classic Cylindrical spring

GASKET PLATE PROFILE



Classic Plate
Classic cylinder-shaped
Profile

GASKET DESIGN



Standard Gasket
Standard Disk Gasket

EXHAUST CAPACITY



450 L/min
maximum exhaust
capacity

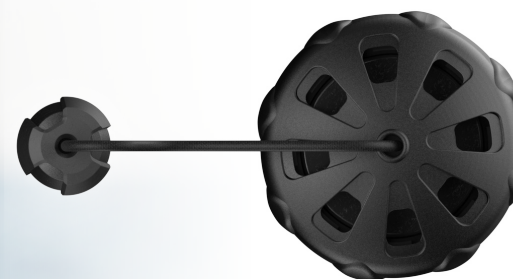
SIZE AND WEIGHT SPECIFICATIONS

21,5 mm
0,85 "



62,6 mm
2,46 "

Weight:
26,39 gr / 0,93 oz

OPV
POI
—ELITEO.P.V.
P01 CLASSIC
ELITE

↓ Fits **P01** Series
Flanges ↓

LID DESIGN
P01 ELITESPRING DYNAMICS
BASE COILPLATE PROFILE
CLASSICGASKET TYPE
STANDARD

A V A I L A B L E C O N F I G U R A T I O N S

O V E R P R E S S U R E S E T T I N G S



SPRING 1.2

0,18 BAR
2,61 PSI

SPRING 1.4

0,24 BAR
3,48 PSI

P U L L K N O B S

**P01**
SERIES
O.P.V.O.P.V. P01 CLASSIC
ELITE

P01 CLASSIC SERIES - Simple overpressure system designed for reliable pressure control. Offers durability and ease of use, suitable for a wide range of applications.
ELITE LID DESIGN - Minimalist contouring with a sleek, modern style.

P01 SERIES - FLANGE SPECS - Designed for the P01 series flanges: Diameter 53 mm, Collar height 13-14 mm, Trapezoidal thread with 3 mm pitch, 8-sector interface.

O.P. VALVE SPECS

O.P.V. PO1 ELITE

sleek, minimalist contouring lid design, with classic cylindrical spring and standard disk gasket, enabling a maximum exhaust capacity of 450 L/min
Compatible with P01 Series flanges for a standard profile height.

P01 CLA ELITE LID
22,5 mm
0,89 "

SYSTEM FEATURES



P01 Elite Lid
Minimalist contouring with a sleek, modern style.

FLANGE FIT



P01 Series Flanges Fit
Flange diameter -53 mm / -2.09 "
Standard Profile
Min. collar height -14 mm / -0.55 "
Trapezoidal thread, 3 mm pitch
8-Ridge alternating interlock coupling section

SPRING DYNAMICS



Base Coil Spring
Classic Cylindrical spring

GASKET PLATE PROFILE



Classic Plate
Classic cylinder-shaped Profile

GASKET DESIGN



Standard Gasket
Standard Disk Gasket

EXHAUST CAPACITY



450 L/min
maximum exhaust capacity



SIZE AND WEIGHT SPECIFICATIONS

22,5 mm
0,89 "



62,6 mm
2,46 "

Weight:
32,52 gr / 1,15 oz

OPV
POI
—STONEO.P.V.
P01 CLASSIC
STONE↓ Fits **P01** Series
Flanges ↓LID DESIGN
P01 STONESPRING DYNAMICS
BASE COILPLATE PROFILE
CLASSICGASKET TYPE
STANDARD

A V A I L A B L E C O N F I G U R A T I O N S

O V E R P R E S S U R E S E T T I N G S



SPRING 1.2

0,18 BAR
2,61 PSI

SPRING 1.4

0,24 BAR
3,48 PSI

P U L L K N O B S



P01 CLASSIC SERIES - Simple overpressure system designed for reliable pressure control. Offers durability and ease of use, suitable for a wide range of applications.

STONE LID DESIGN - Bold, robust design merging massiveness and durability.

P01 SERIES - FLANGE SPECS - Designed for the P01 series flanges: Diameter 53 mm, Collar height 13-14 mm, Trapezoidal thread with 3 mm pitch, 8-sector interface.

O.P. VALVE SPECS

O.P.V. POI STONE

bold, modern aesthetic stone lid design, with classic cylindrical spring and standard disk gasket, enabling a maximum exhaust capacity of 450 L/min
Compatible with P01 Series flanges for a standard profile height.

P01 CLA Stone Lid
20,75 mm
0,82 "

SYSTEM FEATURES



P01 Stone Lid
Bold, robust design merging massiveness and durability.

FLANGE FIT



P01 Series Flanges Fit
Flange diameter ~53 mm / ~2.09 "
Standard Profile
Min. collar height ~14 mm / ~0.55 "
Trapezoidal thread, 3 mm pitch
8-Ridge alternating interlock coupling section

SPRING DYNAMICS



Base Coil Spring
Classic Cylindrical spring

GASKET PLATE PROFILE



Classic Plate
Classic cylinder-shaped Profile

GASKET DESIGN



Standard Gasket
Standard Disk Gasket

EXHAUST CAPACITY



450 L/min
maximum exhaust capacity

SIZE AND WEIGHT SPECIFICATIONS

20,75 mm
0,82 "



62,6 mm
2,46 "

Weight:
35,1 gr / 1,24 oz