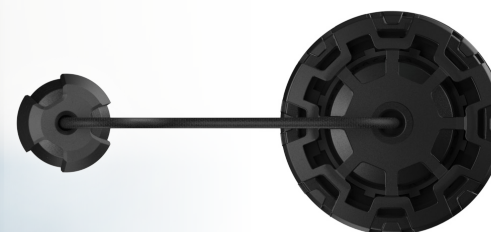


OPV
P04
—SHARPO.P.V.
P04 CLASSIC
SHARP↓ Fits **P04** Series
Flanges ↓LID DESIGN
P04 SHARPSHIELD
TECHNOLOGYSPRING DYNAMICS
CONIC COILPLATE PROFILE
SECTORGASKET TYPE
SLOT-FITCERFI
CARBON FIBER
TECHPOLYMER

A V A I L A B L E C O N F I G U R A T I O N S

O V E R P R E S S U R E S E T T I N G S


SPRING 1.2

0,18 BAR
2,61 PSI

SPRING 1.4

0,24 BAR
3,48 PSI

P U L L K N O B S

**P04**
SERIES
O.P.V.O.P.V. P04 CLASSIC
SHARP**P04 CLASSIC SERIES** - Designed for the P04 series flanges: Diameter 45 mm, Collar height 10-11 mm, Trapezoidal thread with 2.5 mm pitch, 5-sector interface.**SHARP LID DESIGN** - Strong, clear-cut lid design with a sleek and technical look**P04 SERIES - FLANGE SPECS** - Designed for the P04 series flanges: Diameter 45 mm, Collar height 10-11 mm, Trapezoidal thread with 2.5 mm pitch, 5-sector interface.

O.P. VALVE SPECS

O.P.V. **P04 SHARP**

P04 Sharp lid with Shield Technology, features conic coil and slot-fit gasket for space efficiency and sector plate for improved performance, designed for a maximum exhaust capacity of 450 L/min
Compatible with P04 Series flanges for a medium profile height.

P04 CLA SHARP Lid
12,4 mm
0,49 "

SYSTEM FEATURES



P04 Sharp Lid
Strong, clear-cut profile, for a cutting-edge design

FLANGE FIT



P04 Series Flanges Fit
Flange diameter ~45 mm / ~1.77 "
Medium profile
Min collar height ~10 mm / ~0.39 "
Trapezoidal thread, 2.5 mm pitch
5-Ridge alternating interlock coupling section.

SPRING DYNAMICS



Conic Coil Spring
Tapered spring maximizes space efficiency and enhances operational range, allowing for increased flow and reduced valve profile

GASKET PLATE PROFILE



Sector Plate
sector-shaped profile optimized for airflow enhancement

GASKET DESIGN



Slot-fit Gasket
Features a dedicated lot for the cord knot, minimizing the overall profile for compact assembly

EXHAUST CAPACITY



600 L/min
maximum exhaust capacity

SIZE AND WEIGHT SPECIFICATIONS

12,4 mm
0,49 "



52,6 mm
2,07 "

Weight:
18,58 gr / 0,66 oz